

# Vu+ SOLO

Your **Smart** Linux TV Player

Vu+ SOLO, as the name itself shows, comes with single DVB-S2 tuner. It is one of the most talented HD Zappers with USB PVR functions, offering a wide range of advanced features like playback of various media types and easy to use plug-ins like YouTube Player.

### Main Features

- |   |   |
|---|---|
| • Linux Operating System                          | • S/PDIF for digital bit stream out (optical) |
| • MPEG2 / H.264 Hardware decoding (DVB compliant) | • Advanced EPG (electronic program guide)     |
| • USB-PVR function                                | • Full automatic service scan                 |
| • 10/100Mbit Ethernet Interface                   | • Supports videotext decoding                 |
| • 1 x Smartcard-Reader (CONAX Embedded)           | • OSD in many languages                       |
| • 2 x CI slot- 2 x USB2.0 - RS232 - 1 x SCART     | • Various OSD skin support                    |



**Vu+ SOLO**  
 Advanced DVB-S2 HD PVR Ready Set Top Box  
 Capable of running a variety of Linux TV applications and plug-ins.

VLC Video Player

YouTube


Internet

E-mail

Photo Player

Google map

Vu+ SOLO is designed to easily integrate various Plug-ins freely available on the Internet.

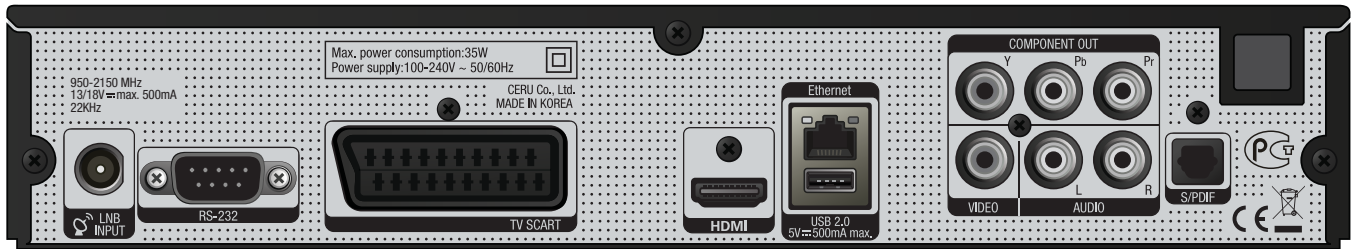

Technical Specifications		
Front Panel	Smart Card slot	1
	Common Interface	2
	USB 2.0	1
	Key	5 buttons (Standby, Vol +/-, Ch +/-)
	Display	Three Color Status Indicator LED
Rear Panel	Sat-IF input / output	1 x F-type socket
	Connection TV	1 X SCART socket
	Video output (analogue)	3 x Cinch socket ( YPbPr)/1 x Cinch-socket
	Video/Audio output ( digital)	1 x HDMI
	Audio output ( analogue )	2 x Cinch socket
	Audio output ( digital )	Standard optical ( SPDIF )
	USB 2.0	1
	Ethernet	1
Power	RS 232	1
	Main range	100-250 / 50-60V/Hz
RF	Power consumption ( Max./typ. Operation/Stand-by )	35 /12 /0.4W
	RF range	950-2,150 MHz
Video	FEC, de-multiplexer	DVB-S / DVB-S2 standard
	Video Resolution	CCIR 601 ( 720 X 576 lines ), 576p, 720p, 1080i
	Video decoding	MPEG-2, MPEG-4 compatible
	Input data rate	2-45 Msymb/s
Audio	S/N	> 53dB
	Decoding	AC3, MPEG-4 ( AAC-HE) , MPEG-1, Layer 1, 2 and 3
	Sampling rate	32 / 4.1 / 48KHz
LNB	S/N	> 65 dB
	LNB supply (horiz./vert. )	14/18; Max. 500 V/mA
General	Control signal	22KHz ; ToneBurst ; DiSEqC 1.0/1.1/1.2 ; USAL
	Dimensions ( W X H x D )	280 x 50 x 200mm
	Weight	1.42 kgs